

INSTRUCTION MANUAL

SOLAR LED GARDEN LIGHT
CCT CHANGEABLE 3 IN 1

TECHNICAL DATA

MODEL	VT-4102
SKU	10304
LUMENS	220Lm
BEAM ANGLE	110°
BODY TYPE	ABS
DIMENSION	720x155mm
BATTERY CAPACITY	2600mAh, Li-ion

SOLAR PANEL DATA

SOLAR PANEL	DC 5.5v, 3W, Plicrystalline
CHARGING TIME	6-8 Hours
WORKING TIME	10-12 Hours




03 YEAR
WARRANTY*

IP65
RATING

INTRODUCTION & WARRANTY

Thank you for selecting and buying V-TAC product. V-TAC will serve you the best. Please read these instructions carefully before starting the installation and keep this manual handy for future reference. If you have any another query, please contact our dealer or local vendor from whom you have purchased the product. They are trained and ready to serve you at the best. The warranty is valid for 3 years from the date of purchase. The warranty does not apply to damage caused by incorrect installation or abnormal wear and tear. The company gives no warranty against damage to any surface due to incorrect removal and installation of the product. This product is warranted for manufacturing defects only.



MULTI-LANGUAGE MANUAL QR CODE

Please scan the QR code to access the manual in multiple languages.

WARNING!

1. Installation must be performed by a qualified person.
2. The light source of this luminaire is not replaceable, when the light source reaches its end of life the whole luminaire should be replaced.
3. Replace any cracked protective shield.
4. Don't immerse in the water
5. Luminaire cannot be installed in low-lying areas, so as not to soak.




This marking indicates that this product should not be disposed of with other household wastes.



Caution, risk of electric shock.

INSTALLATION DIAGRAM

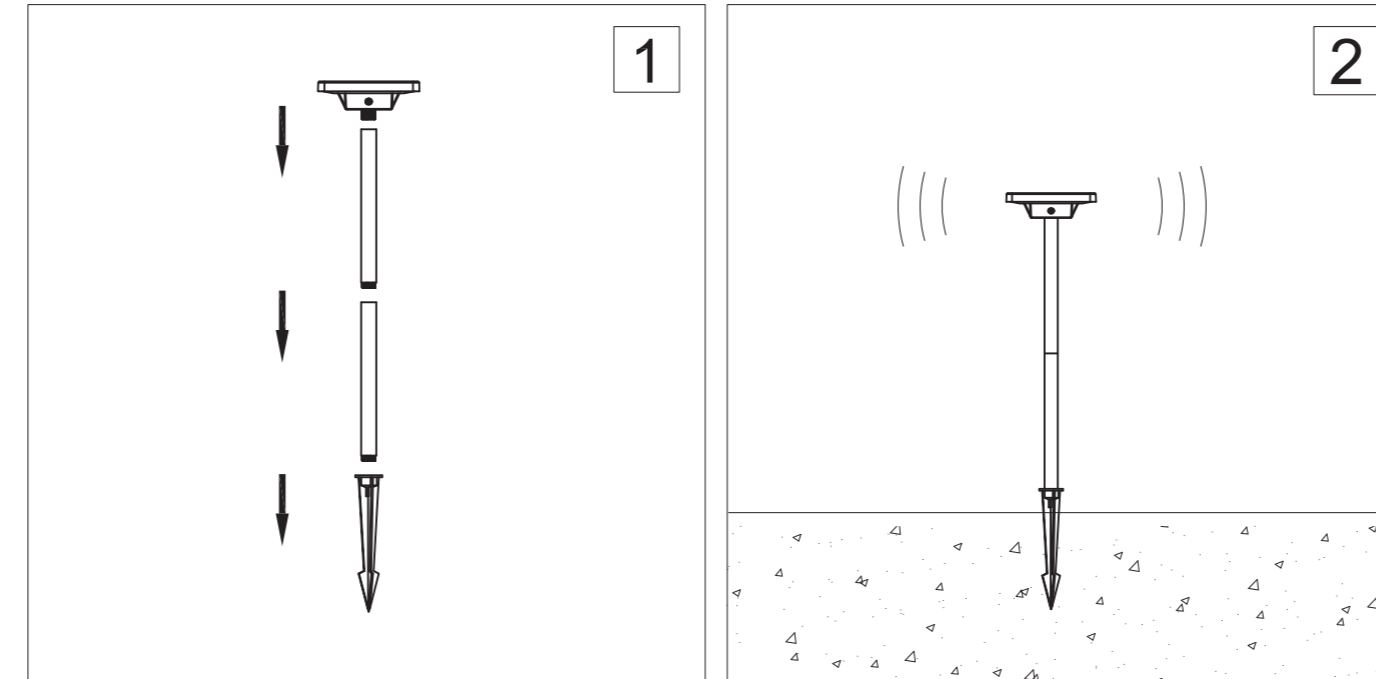

INSTALLATION INSTRUCTIONS

- Fix the lamp on the grass.
- Press the switch to start the working mode.
- Adjust the direction of light.
- Adjust the solar panel to face the sunlight.

MAINTENANCE

- Clean the light with a dry, lint-free cloth.
- Check the solar panel for dirt regularly. If dirt or is present remove it to guarantee flawless function of the product.
- Especially during the winter, keep the product free from snow and ice.
- Confirm installation direction is correct.
- Confirm no objects blocking the solar panel to receive sunlight

FUNCTION

1. Switch setting and working mode: Long press the switch on the lamp panel for 2 seconds, it will turn on (the blue indicator light is always bright in the startup state, regardless of day and night). It will enter mode 1, in which the blue indicator light is steadily on, and if long press the switch for 2 seconds, then it will turn off (the blue indicator light goes off in the shut down state).

2. Working mode: In the state of startup and setting working mode, automatic charging will not turn on the light during the day but only at night; In the off state, the automatic charging will not turn on the light during both day and night.

UNDER STARTUP AND SET WORKING MODE, THE WORKING MODE IS AS FOLLOWS:

Mode 1: At night, the luminaire shall maintain a low brightness of 5%; when the lamp detects a person within 3—5 meters, the lamp will turn to 100% brightness; when people leave the sensor range of the lamp, the lamp will keep high light for 25—30 seconds, and then turn to 5% low light. when no one is detected in the sensor range of the lamp, the lamp will keep 5% low light. It can last more than 12 hours in low light.

COLOR TEMPERATURE CHANGE SEQUENCE:

by default at 3000K, press to 4000K, and then press again 6500K.

RoHS



UK
CA