

OLIGHTPRO




Caratteristiche Generali

- Telaio completo di manico con piedini antivibranti
- Pompa a 3 pistoni assiali comandati dal piattello oscillante
- Valvola di by-pass automatica
- Valvola termica
- Aspirazione detergente incorporata
- Aspirazione detergente regolabile
- Motorizzato Rato, con sensore mancanza olio
- Livelli olio ispezionabili
- Tappi ed asole di scarico per agevolare la manutenzione ed il cambio olio
- Filtro acqua ispezionabile
- Soluzioni studiate per ottimizzare gli ingombri

General Features

- Metal frame with handle and anti-vibrating feet
- 3 Axial stainless steel pistons wobble-plate pump
- Automatic by-pass valve
- Thermal valve
- Built-in detergent suction
- Powered by Rato engine with low oil level sensor
- Inspectable oil levels
- Discharge plugs and discharge slots to make easy the maintenance and the oil change
- Inspectable water filter
- Space-saving solutions

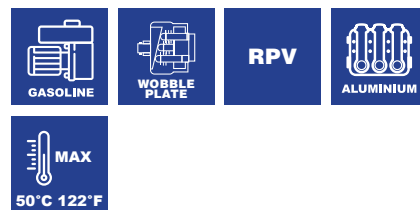

MOD	COD	MAX	MAX						KG NET	
		bar	psi	l/h	gph	kW	rpm	HP	Engine Type	kg
1415	26213	130	1900	420	111	1,4	3400	2.5	RATO	17,4

Accessori standard Standard accessories

