

HEAVYPRO




Caratteristiche Generali

- Carrello a due ruote completo di manico
- Pompa a 3 pistoni in ceramica, con sistema biella-manovella
- Valvola di bypass automatica con azzeramento della pressione nella testa pompa
- Motore elettrico monofase a induzione con protezione termica
- Regolazione della pressione
- Manometro
- Aspirazione detergente incorporata
- Aspirazione detergente regolabile
- Funzione autoadescante
- Tubo rinforzato con treccia in acciaio (10 m)

General Features

- Two-wheel trolley unit with handle
- Triplex pump with ceramic pistons and connecting rod system
- Automatic bypass valve with pressure shut-off at pump head
- Single-phase induction motor with thermal protection
- Pressure adjustment
- Pressure gauge
- Built-in detergent suction
- Adjustable detergent injector
- Self-priming function
- Steel braided hose (10 m)

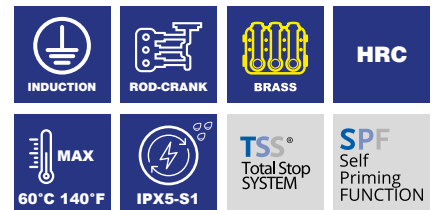

MOD	COD	MAX		MAX										KG NET
		bar max	bar work	psi max	psi work	l/h work	gph work	hp	kW	kW work	rpm	Hz	V	kg
930	14261	150	120	2175	1740	630	166	3	2,2	3	1450	50	230~	43,6

Accessori standard Standard accessories

