

HEAVYPRO




Caratteristiche Generali

- Carrello a due ruote completo di manico
- Pompa a 3 pistoni in ceramica, con sistema biella-manovella
- Valvola di bypass automatica con azzeramento della pressione nella testa pompa
- Motore elettrico monofase a induzione con protezione termica
- Regolazione della pressione
- Manometro
- Aspirazione detergente incorporata
- Aspirazione detergente regolabile
- Funzione autoadescante
- Tubo rinforzato con treccia in acciaio (10 m)

General Features

- Two-wheel trolley unit with handle
- Triplex pump with ceramic pistons and connecting rod system
- Automatic bypass valve with pressure shut-off at pump head
- Single-phase induction motor with thermal protection
- Pressure adjustment
- Pressure gauge
- Built-in detergent suction
- Adjustable detergent injector
- Self-priming function
- Steel braided hose (10 m)

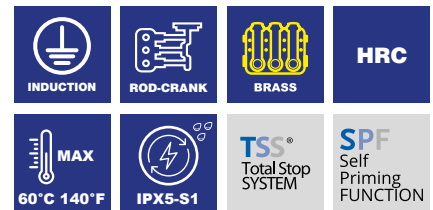

MOD	COD	MAX		MAX		MAX		MAX		MAX		MAX		KG NET
		bar max	bar work	psi max	psi work	l/h work	gph work	hp	kW	kW work	rpm	Hz	V	kg
960	15479	200	180	2900	2610	840	221	6,1	4,5	5	1450	50	400 3~	45,5

Accessori standard Standard accessories

