


ASSEMBLY INSTRUCTIONS

Before installation, check the specifications described in the "*Important safety instructions*" section to determine whether the room to be installed is suitable for use of the unit.

Installation of wall-mounted bioethanol fireplace FUIORE 120

The bio-fireplace should be installed on the wall only by a certified installer. Only install the bio-fireplace on a wall made of non-flammable materials. Before installation, check the specifications described under "**Important safety instructions**" to determine whether the room intended for installation is suitable for the appliance.

For installation, the position of the mounting holes must be marked on the wall at the target location. It is recommended to use a level to obtain the plumb and level of the mounting strips. When installing a bioethanol fireplace under a TV, a distance of 40-50 cm is recommended. If installed under the TV, the bioethanol fireplace should be mounted so that the heat does not directly affect the TV. Use plasterboard with increased temperature resistance.




Drill holes and fix the rail with the fasteners to the wall using the mounting materials provided (the fasteners provided are suitable for stone, brick and concrete walls). **Hang the bioethanol fireplace on the fixing rail and make sure that the fixing rails and the unit are securely fastened.**

Before or after installing the appliance, make sure that the location on which the appliance is mounted can support its weight.

It is advisable to install a thermal mat behind the bioethanol fireplace (we recommend placing it on the back of the bioethanol fireplace) to avoid direct heat impact on the surface on which it is mounted.

Place the bioethanol container in the appliance. Never place a filled biofuel container, as fuel may be inadvertently spilled on parts of the appliance or its surroundings. For adjustable containers, place the bioethanol container lid on the container in such a way that the lid can move freely back and forth when closing or controlling the flame height.

Specifications and dimensions of wall-mounted bioethanol fireplace FUIORE 120

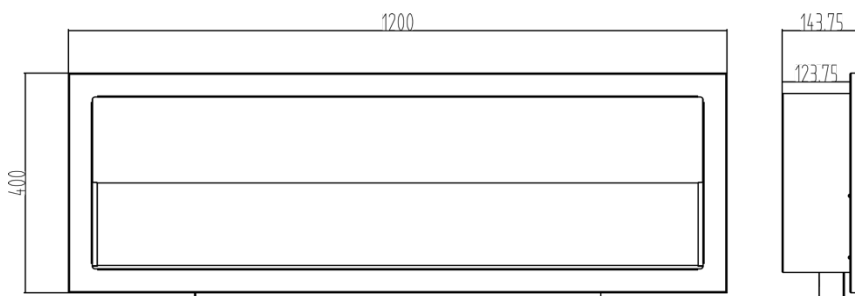

NAME	FUIORE 120
Weight [kg]	10,63
Burner capacity [l]	1,24
Burning time [h]	2,4

Minimum distance from flammable materials: 0.5 metres